



0700 SERIES

125 LBS



FEATURES

KINGPIN: 5/16" rivet
RACEWAY: 3/16" diameter over and under race; hardened steel load bearings
BUSHING: Nylon, steel or ball bearings
AXLE&NUT: 1/4" riveted axle

FINISH: Bright chrome finish
HARDENED: Washer
SPECIAL: Wide selection of specialty stems and plates
LEG SPACING: 1"

EXCELLENT FOR:

- Office furniture
- Institutional equipment
- Hospital environment



OPTIONS:

- AN Axle and Nut
 BB Ball Bearings (Envirothane™ Tapered Wheel Only)
 C Raceway Seal (not avail. w/ HW)
 PB Precision Bearing (Ice Wheels Only)

FINISHES:

- 07?AB Antique Brass
 07?AC Antique Copper
 07?4F Black Flat
 07?4G Black Gloss
 07?4I Black Ionic
 07?1 Brass Lacquer
 07?BN Brush Nickel
 07?2 Chrome
 Inquiries on other finishes welcome

SPECIAL:

Urethane wheels are hard enough for carpeted floors and soft enough for tiled floors

BIFMA approved

WHEEL		CASTER			PART NUMBER		Caster Weight (lbs)	
Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type		Swivel
2"	7/8"	75	Plain	2"	2 5/8"	ProTech™ Flat	S0702-***-PROF	0.43
		80	Steel			Conductive Soft Rubber	S0702-***-CSR	0.47
		125	Plain			Polyolefin	S0702-***-PO	0.37
		125	Nylon			Envirothane™	S0702-***-U	0.38
		125	Nylon			Envirothane™ Grey	S0702-***-UG	0.43
		125	Nylon			Envirothane™ Tapered	S0702-***-UT	0.43
		125	Ball			Envirothane™ Tapered	S0702-***-UT-BB	0.53
2"	7/8"	75	Steel	2 1/8"	2 15/16"	ProTech™ Flat	S0722-***-2PROF	0.39
		80	Steel			Conductive Soft Rubber	S0722-***-2CSR	0.44
		80	Precise			Ice	S0722-***-2ICE-PB	0.48
		80	Steel			Soft Rubber	S0722-***-2SR	0.44
		80	Steel			Soft Rubber Grey	S0722-***-2SRG	0.44
		125	Plain			Polyolefin	S0722-***-2PO	0.44
		125	Nylon			Envirothane™	S0722-***-2U	0.44
		125	Nylon			Envirothane™ Grey	S0722-***-2UG	0.44
		125	Nylon			Envirothane™ Tapered	S0722-***-2UT	0.41
		125	Ball			Envirothane™ Tapered	S0722-***-2UT-BB	0.54
2 1/2"	7/8"	75	Plain	2 3/16"	3 3/16"	ProTech™ Flat	S0722-***-PROF	0.42
		80	Nylon			Conductive Soft Rubber	S0722-***-CSR	0.52
		80	Precision			Ice	S0722-***-ICE-PB	0.48
		80	Nylon			Soft Rubber	S0722-***-SR	0.52
		125	Plain			Polyolefin	S0722-***-PO	0.43
		125	Nylon			Envirothane™	S0722-***-U	0.47
		125	Nylon			Envirothane™ Grey	S0722-***-UG	0.47
		125	Nylon			Envirothane™ Tapered	S0722-***-UT	0.48
125	Ball	Envirothane™ Tapered BB	S0722-***-UT-BB	0.59				



* Caster weight and OH based on Plate
 * See stem options for overall height (OH) differences



PLATE DIAGRAMS

STANDARD PLATE: **A12D**

Plate Thickness: 3/32"

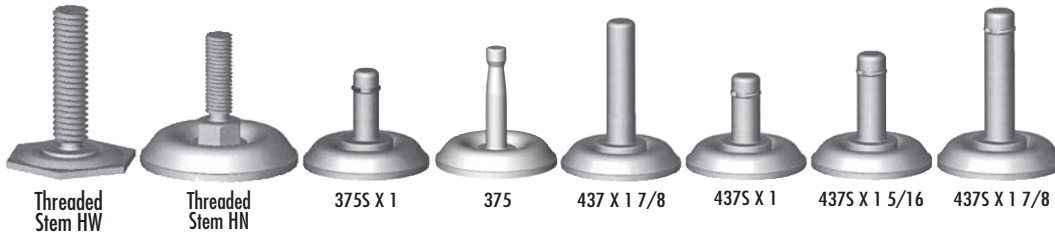

THREADED STEMS HEX WASHER


-0.203" [5.156mm] To Std OH

***	DIAMETER	LENGTH	TYPE
5/16-18X13/16HW	5/16"	13/16"	NC
5/16-18X1HW	5/16"	1"	NC
3/8-16X1/2HW	3/8"	1/2"	NC
3/8-16X3/4HW	3/8"	3/4"	NC
3/8-16X1HW	3/8"	1"	NC
3/8-16X1 1/2HW	3/8"	1 1/2"	NC

ICE WHEEL COLOURS

+Actual colours may vary

COLOUR	PART NUMBER	SIZE AVAILABILITY	
CLEAR	ICE	2" * 2 5/16" * 3"	
BLUE	ICEB	2" * 2 5/16" * 3"	
BLACK	ICEBL	2"	
GREEN*	ICEG*	2"* * 2 5/16" * 3"	
ORANGE*	ICEO*	3"*	
PURPLE*	ICEP*	3"*	
PINK	ICEPI	3"	
RED*	ICER*	2" * 2 5/16"* * 3"	

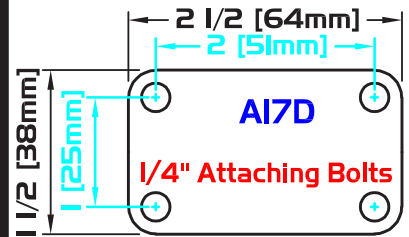

THREADED STEMS HEX NUT

+0.031" [0.78mm] To Std OH

***	DIAMETER	LENGTH	TYPE
5/16-18X3/4HN	5/16"	3/4"	NC
5/16-18X1HN	5/16"	1"	NC
3/8-16X5/8HN	3/8"	5/8"	NC
3/8-16X1HN	3/8"	1"	NC
3/8-16X1 1/2HN	3/8"	1 1/2"	NC

ROUND STEMS

-0.203" [5.156mm] To Std OH

***	DIAMETER	LENGTH	TYPE
375SX1	3/8"	1"	Friction Ring
375	5/16"	1 9/16"	Grip Neck
437X1 7/8	7/16"	1 7/8"	Plain
437SX1	7/16"	1"	Friction Ring
437SX1 5/16	7/16"	1 5/16"	Friction Ring
437SX1 7/8	7/16"	1 7/8"	Friction Ring

* Custom order run 2,500 pieces minimum. Call for availability