




8900 SCAFFOLD CASTER SERIES

800 LBS

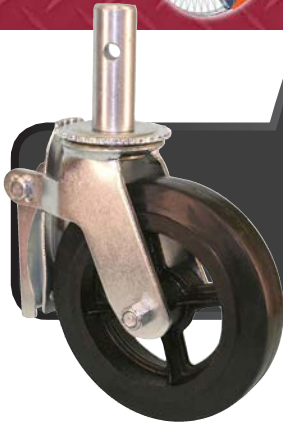

FEATURES

KINGPIN: 1 1/16" diameter kingpin
RACEWAY: 3/8" diameter upper race; 5/16" diameter lower race
BUSHING: Roller bearings with drilled hardened steel spanner bushing & plastic side washers
AXLE&NUT: 1/2" zerk axle and lock nut

FINISH: Corrosion resistant bright zinc
HARDENED: Washers
LEG SPACING: 2 1/2"
SPECIAL: Extra high safety factor for maximum accident prevention. High quality dual locking system that engages wheel tread and swivel section.

EXCELLENT FOR:

- High quality scaffolding requirements
- Motion picture equipment
- Flood light stand
- Other mobile equipment



OPTIONS:

- BB Ball Bearing
- BR Bronze Bearing
- DB Delrin Bearing
- HT Heat-treated
- NB Nylon Bearing
- PB Precision Ball Bearing
- RBC Caged Roller Bearing
- SSW Steel Side Washer
- SWH Heat-treated Side Washer
- TG Thread Guards
- Z Zerk in Axle

WHEEL		CASTER				PART NUMBER			Caster Weight (lbs)
Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel		
6"	2"	450	Roller	4 1/2"	7 1/2"	ProTech™ Crown	S8906-SC-PRO-RB	7.47	
		500	Roller			Moldon Alum. Rubber	S8906-SC-MAR-RB	8.15	
		500	Roller			Moldon Rubber	S8906-SC-MR-RB	9.83	
		500	Roller			ProTech™ Flat	S8906-SC-PROF-RB	7.47	
		600	Roller			Moldon Alum. Urethane	S8906-SC-MAU-RB	8.11	
		600	Roller			Moldon Poly. Urethane	S8906-SC-MPU-RB	7.93	
		600	Roller			Envirothane™	S8906-SC-U-RB	8.11	
		600	Precision			Envirothane™ Grey - PB	S8906-SC-UG-PB	7.88	
		600	Roller			Envirothane™ Grey-WOW-RB	S8906-SC-UGW-RB	8.11	
		600	Precision			Envirothane™ Grey Crowned - PB	S8906-SC-UGC-PB	7.83	
		600	Roller			Moldon Urethane	S8906-SC-UR-RB	10.29	
		600	Roller			Moldon Urethane Crown	S8906-SC-URC-RB	9.70	
8"	2"	600	Roller	6"	9 1/2"	Moldon Alum. Rubber	S8908-SC-MAR-RB	9.35	
		600	Roller			Moldon Rubber	S8908-SC-MR-RB	11.97	
		600	Roller			ProTech™ Crown	S8908-SC-PRO-RB	8.66	
		650	Roller			ProTech™ Flat	S8908-SC-PROF-RB	8.62	
		800	Roller			Moldon Alum. Urethane	S8908-SC-MAU-RB	9.53	
		800	Roller			Moldon Poly. Urethane	S8908-SC-MPU-RB	8.81	
		800	Roller			Envirothane™	S8908-SC-U-RB	9.43	
		800	Precision			Envirothane™ Grey - PB	S8908-SC-UG-PB	9.37	
		800	Roller			Envirothane™ Grey-WOW-RB	S8908-SC-UGW-RB	9.43	
		800	Precision			Envirothane™ Grey Crowned - PB	S8908-SC-UGC-PB	9.37	
		800	Roller			Moldon Urethane	S8908-SC-UR-RB	12.69	
		800	Roller			Moldon Urethane Crown	S8908-SC-URC-RB	12.25	

* Caster weight based on SC Stem

STEMS

ROUND STEMS

***	DIAMETER	LENGTH	TYPE
SC	1 3/8"	4"	NC

