



# LL LEVELING CASTERS

## SERIES

# 880LBS



### FEATURES

**KINGPIN:** 5/16" (for SLL0050); 3/8" (for SLL0300); 15/32" (for SLL0600 & SLL1000)  
**RACEWAY:** 5/32" (for SLL0050); 7/32" (for SLL0300); 1/4" (for SLL1000)  
**BUSHING:** Nylon bearing

**AXLE&NUT:** 5/16" axle & nut (for SLL0050); 3/8" (for SLL0300); 15/32" (for SLL0600 & SLL1000)  
**FINISH:** Powder coated Ivory, (available in Black upon request)  
**HARDENED:** Washers  
**LEG SPACING:** 7/8" (for SLL0050); 15/16" (for SLL0300); 1 9/32" (for SLL0600); 1 7/16" (for SLL1000)



NYLON

### EXCELLENT FOR:

- Testing & packing machines
- Weaving machinery
- Numbering machines
- Printing presses
- Computer equipment










### SPECIAL:

This die-cast aluminum caster allows for moving heavy equipment. Once the equipment is in place, there is an adjustment knob in the back that is turned which brings down the foot or pad, lifting the wheel off the ground to prevent rolling. The foot is raised until the unit is level.


### WHEEL

### CASTER

### PART NUMBER

Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Maximum Overall Height	Wheel Type	Swivel	Caster Weight (lbs)
									
<b>1 21/32"</b>	<b>11/16"</b>	110	Plain	2 1/16"	2 13/16"	3 3/16"	Nylon	SLL0050-B22E-NY	0.84
		110	Plain	2 1/16"	2 13/16"	3 3/16"	Nylon	SLL0050-M8-1.25DT-NY	0.84
		110	Plain	2 1/16"	2 13/16"	3 3/16"	Nylon	SLL0050-M12-1.75DT-NY	0.84
<b>2"</b>	<b>7/8"</b>	330	Plain	2 7/16"	3 1/4"	3 5/8"	Nylon	SLL0300-B21F-NY	1.68
		330	Plain	2 7/16"	3 1/4"	3 5/8"	Nylon	SLL0300-M12-1.75DT-NY	1.37
		330	Plain	2 7/16"	3 1/4"	3 5/8"	Nylon	SLL0300-M16-2DT-NY	1.37
<b>2 7/16"</b>	<b>1 1/8"</b>	660	Plain	3 1/16"	4"	4 5/8"	Nylon	SLL0600-B19H-NY	3.04
		660	Plain	3 1/16"	4"	4 5/8"	Nylon	SLL0600-M12-1.75DT-NY	2.47
		660	Plain	3 1/16"	4"	4 5/8"	Nylon	SLL0600-M16-2DT-NY	2.47
<b>2 13/16"</b>	<b>1 7/32"</b>	880	Plain	3 1/2"	4 3/4"	5 7/16"	Nylon	SLL1000-B20H-NY	4.01
		880	Plain	3 1/2"	4 3/4"	5 7/16"	Nylon	SLL1000-M16-2DT-NY	3.44

### PLATE DIAGRAMS

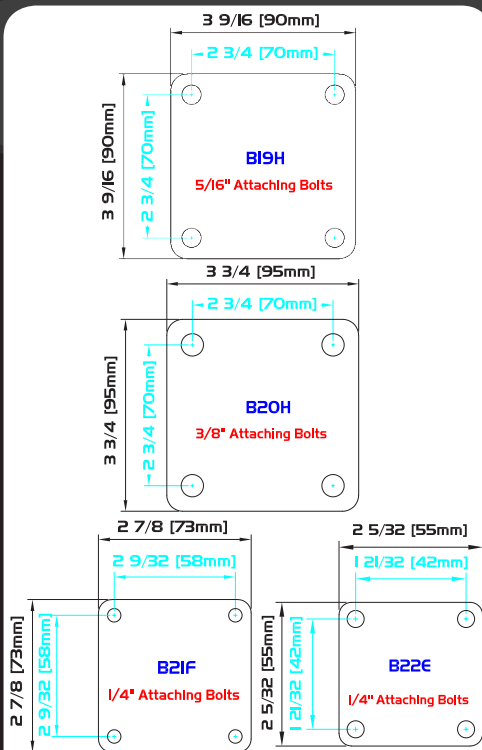

### HOLES

#### TAPPED HOLES

***	DIAMETER	MIN. DEPTH	PITCH
M8-1.25DT	M8	5/16"	1.25
M12-1.75DT	M12	13/16"	1.75
M16-2DT	M16	9/16"	2



Tapped Hole

