



AXLE&NUT: 1/2" zerk axle and lock nut (except with PB)
FINISH: Corrosion resistant bright zinc
LUBRICATION: Grease nipple in lower race
HARDENED: Work hardened double ball race
LEG SPACING: 2 1/2"

US Patent No: 6,539,578
CAD Patent No: 2,311,524

EXCELLENT FOR:

- Mobile motion picture staging
- Aircraft ground support equipment
- In-plant trailer parts
- Trash containers
- Tool carts
- Amusement parks
- Asphalt paving machinery
- Material handling equipment



OPTIONS:

- | | |
|------|--|
| iLKW | Wheel Only iLock
(for 6" only) |
| UWB | Universal Wheel Brake |
| 1PSL | 1 Position Swivel Lock |
| 2PSL | 2 Position Swivel Lock |
| 3PSL | 3 Position Swivel Lock |
| 4PSL | 4 Position Swivel Lock
without wings (welded) |
| BB | Ball Bearing |
| BR | Bronze Bearing |
| DB | Delrin Bearing |
| NB | Nylon Roller Bearing |
| PB | Precision Ball Bearing |
| RBC | Caged Roller Bearing |
| C | Raceway Seal |
| OH | Special Overall Height |
| SSW | Steel Side Washer |
| SWH | Heat-treated Side Washer |
| TG | Thread Guards |
| Z | Zerk in Wheel |

FINISHES:

- SL68?2 Chrome
SL68?4 Black
Inquiries on other finishes welcome



**RollX™ All Terrain
Diamond**

RollX™- Spoked

RollX™- WOW




RollX™

RollX™
West Coast Blue



WHEEL		CASTER				PART NUMBER				
Diameter 	Tread Width 	Capacity Lbs. 	Bearing Type 	Swivel Radius 	Overall Height 	Wheel Type 	Swivel 	Caster Weight (lbs) 	Rigid 	Caster Weight (lbs) 
5"	2"	350	Ball	4 13/16"	8"	Alum. Rubber Grey	SSL6863-***-5ARG-RB-Δ	10.95	RSL6863-***-5ARG-RB-Δ	9.45
		350	Roller			Soft Rubber	SSL6863-***-5SR-RB-Δ	10.77	RSL6863-***-5SR-RB-Δ	9.27
		375	Roller			ProTech™ Crown	SSL6863-***-5PRO-RB-Δ	9.98	RSL6863-***-5PRO-RB-Δ	8.48
		450	Roller			Moldon Rubber	SSL6863-***-5MR-RB-Δ	11.66	RSL6863-***-5MR-RB-Δ	10.16
		500	Roller			Moldon Alum. Rubber	SSL6863-***-5MAR-RB-Δ	10.44	RSL6863-***-5MAR-RB-Δ	8.94
		650	Roller			Polyolefin	SSL6863-***-5POX-RB-Δ	9.50	RSL6863-***-5POX-RB-Δ	8.00
		750	Roller			High Temp Phenolic (475°)	SSL6863-***-5HTPH-RB-Δ	10.54	RSL6863-***-5HTPH-RB-Δ	9.04
		800	Roller			Lava™ (475°)	SSL6863-***-5LV-RB-Δ	9.83	RSL6863-***-5LV-RB-Δ	8.33
		800	Roller			Envirothane™	SSL6863-***-5U-RB-Δ	10.24	RSL6863-***-5U-RB-Δ	8.74
		800	Precision			Envirothane™ Grey - PB	SSL6863-***-5UG-PB-Δ	10.29	RSL6863-***-5UG-PB-Δ	8.79
		800	Roller			Envirothane™ Grey-WOW-RB	SSL6863-***-5UGW-RB-Δ	10.24	RSL6863-***-5UGW-RB-Δ	8.74
		900	Roller			Moldon Poly. Urethane	SSL6863-***-5MPU-RB-Δ	10.22	RSL6863-***-5MPU-RB-Δ	8.72
		950	Roller			ALTthane™	SSL6863-***-5ALT-RB-Δ	9.84	RSL6863-***-5ALT-RB-Δ	8.34
		1,000	Roller			Moldon Alum. Urethane	SSL6863-***-5MAU-RB-Δ	10.34	RSL6863-***-5MAU-RB-Δ	8.84
		1,000	Roller			Nyroll™	SSL6863-***-5NYNW-RB-Δ	10.08	RSL6863-***-5NYNW-RB-Δ	8.58
		1,000	Roller			Phenolic	SSL6863-***-5PH-RB-Δ	10.44	RSL6863-***-5PH-RB-Δ	8.94
		1,000	Precision			Purthane™	SSL6863-***-5PTN-PB-Δ	10.76	RSL6863-***-5PTN-PB-Δ	9.26
		1,000	Roller			RollX™	SSL6863-***-5RX-RB-Δ	9.78	RSL6863-***-5RX-RB-Δ	8.28
		1,000	Roller			Solid Steel	SSL6863-***-5SS-RB-Δ	12.78	RSL6863-***-5SS-RB-Δ	10.98
		1,100	Roller			Lava™-WOW (475°)	SSL6863-***-5LVW-RB-Δ	10.15	RSL6863-***-5LVW-RB-Δ	8.65
1,200	Roller	Moldon Urethane	SSL6863-***-5UR-RB-Δ	12.28	RSL6863-***-5UR-RB-Δ	10.78				
1,400	Roller	V Groove	SSL6863-***-5VG-RB-Δ	13.50	RSL6863-***-5VG-RB-Δ	12.00				
1,500	Roller	Ductile Iron Crowned	SSL6863-***-5DIC-RB-Δ	13.06	RSL6863-***-5DIC-RB-Δ	11.56				
1,500	Roller	RollX™-WOW	SSL6863-***-5RXW-RB-Δ	10.10	RSL6863-***-5RXW-RB-Δ	8.60				

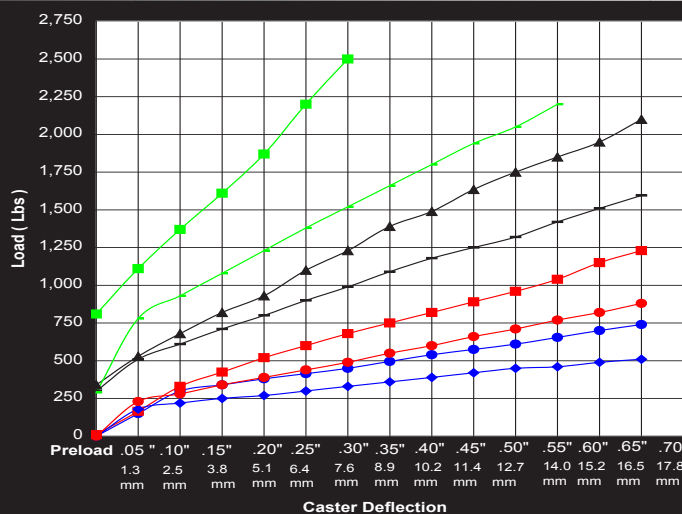

Δ - Spring Type






Type	Wheel Dia.
 A	5" or 6"
 B	5" or 6"
 C	5" or 6" (Std.)
 D	5" or 6"
 A	8"
 B	8"
 C	8" (Std.)
 D	8"

STANDARD PLATE:

A46H

H - Plate Thickness: 1/4"

PLATE DIAGRAMS

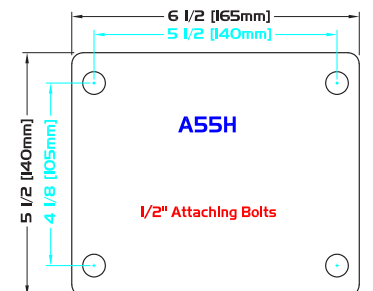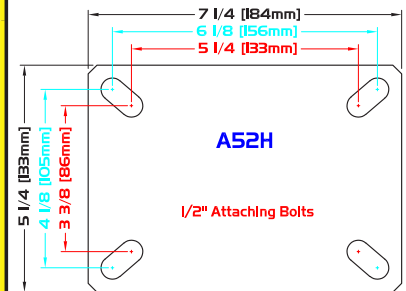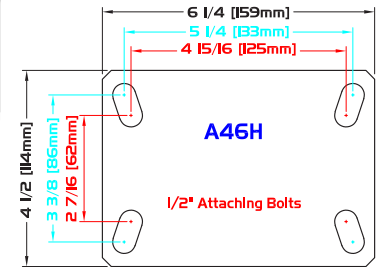

WHEEL		CASTER		PART NUMBER									
Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel	Caster Weight (lbs)	Rigid	Caster Weight (lbs)			
6"	2"	275	Precision	5 5/16"	8 1/2"	Flat Free	SSL6863-***-FFC-PBB-Δ	9.50	RSL6863-***-FFC-PBB-Δ	8.00			
		450	Ball			Balloon Cushion Rubber Grey	SSL6863-***-BARG-BB-Δ	11.29	RSL6863-***-BARG-BB-Δ	9.79			
		450	Roller			ProTech™ Crown	SSL6863-***-PRO-RB-Δ	10.28	RSL6863-***-PRO-RB-Δ	8.78			
		500	Roller			Moldon Alum. Rubber	SSL6863-***-MAR-RB-Δ	10.96	RSL6863-***-MAR-RB-Δ	9.46			
		500	Roller			Moldon Rubber	SSL6863-***-MR-RB-Δ	12.64	RSL6863-***-MR-RB-Δ	11.14			
		500	Roller			ProTech™ Flat	SSL6863-***-PROF-RB-Δ	10.28	RSL6863-***-PROF-RB-Δ	8.78			
		700	Roller			Polyolefin	SSL6863-***-POX-RB-Δ	9.65	RSL6863-***-POX-RB-Δ	8.15			
		900	Roller			High Temp Phenolic (475°)	SSL6863-***-HTPH-RB-Δ	11.34	RSL6863-***-HTPH-RB-Δ	9.84			
		900	Roller			Moldon Poly. Urethane	SSL6863-***-MPU-RB-Δ	10.74	RSL6863-***-MPU-RB-Δ	9.24			
		950	Roller			Envirothane™	SSL6863-***-U-RB-Δ	10.92	RSL6863-***-U-RB-Δ	9.42			
		950	Precision			Envirothane™ Grey - PB	SSL6863-***-UG-PB-Δ	10.68	RSL6863-***-UG-PB-Δ	9.18			
		950	Roller			Envirothane™ Grey-WOW-RB	SSL6863-***-UGW-RB-Δ	10.92	RSL6863-***-UGW-RB-Δ	9.42			
		950	Precision			Envirothane™ Grey Crowned	SSL6863-***-UGC-PB-Δ	10.63	RSL6863-***-UGC-PB-Δ	9.13			
		1,000	Precision			PurThane™	SSL6863-***-PTN-PB-Δ	11.26	RSL6863-***-PTN-PB-Δ	9.76			
		1,100	Roller			Lava™ (475°)	SSL6863-***-LV-RB-Δ	10.05	RSL6863-***-LV-RB-Δ	8.55			
		1,150	Roller			ALTthane™	SSL6863-***-ALT-RB-Δ	10.39	RSL6863-***-ALT-RB-Δ	8.89			
		1,200	Roller			Moldon Alum. Urethane	SSL6863-***-MAU-RB-Δ	10.92	RSL6863-***-MAU-RB-Δ	9.42			
		1,200	Roller			Phenolic	SSL6863-***-PH-RB-Δ	11.24	RSL6863-***-PH-RB-Δ	9.74			
		1,200	Roller			RollX™	SSL6863-***-RX-RB-Δ	10.00	RSL6863-***-RX-RB-Δ	8.50			
		1,200	Roller			Solid Steel	SSL6863-***-SS-RB-Δ	13.62	RSL6863-***-SS-RB-Δ	12.12			
		1,250	Roller			Moldon Urethane	SSL6863-***-UR-RB-Δ	13.10	RSL6863-***-UR-RB-Δ	11.60			
		1,300	Roller			Lava™-WOW (475°)	SSL6863-***-LVW-RB-Δ	10.56	RSL6863-***-LVW-RB-Δ	9.06			
		1,400	Roller			Nyroll™	SSL6863-***-NYNW-RB-Δ	10.55	RSL6863-***-NYNW-RB-Δ	9.05			
		1,400	Roller			V Groove	SSL6863-***-VG-RB-Δ	14.75	RSL6863-***-VG-RB-Δ	13.25			
		1,500	Roller			Ductile Iron Crowned	SSL6863-***-DIC-RB-Δ	14.08	RSL6863-***-DIC-RB-Δ	12.58			
		1,500	Precision			RollX™-WOW-PB	SSL6863-***-RXW-PB-Δ	10.87	RSL6863-***-RXW-PB-Δ	8.75			
		1,500	Roller			RollX™-WOW	SSL6863-***-RXW-RB-Δ	10.58	RSL6863-***-RXW-RB-Δ	8.46			
8"	2"	280	Precision	6 7/8"	10 1/2"	Flat Free	SSL6883-***-FFC-PBB-Δ	11.09	RSL6883-***-FFC-PBB-Δ	9.59			
		550	Ball			Balloon Cushion Rubber Grey	SSL6883-***-BARG-BB-Δ	13.51	RSL6883-***-BARG-BB-Δ	12.01			
		600	Roller			Moldon Alum. Rubber	SSL6883-***-MAR-RB-Δ	12.50	RSL6883-***-MAR-RB-Δ	11.00			
		600	Roller			Moldon Rubber	SSL6883-***-MR-RB-Δ	15.12	RSL6883-***-MR-RB-Δ	13.62			
		600	Roller			ProTech™ Crown	SSL6883-***-PRO-RB-Δ	11.81	RSL6883-***-PRO-RB-Δ	10.31			
		675	Roller			ProTech™ Flat	SSL6883-***-PROF-RB-Δ	11.77	RSL6883-***-PROF-RB-Δ	10.27			
		900	Roller			Polyolefin	SSL6883-***-POX-RB-Δ	10.79	RSL6883-***-POX-RB-Δ	9.29			
		1,000	Roller			Moldon Poly. Urethane	SSL6883-***-MPU-RB-Δ	11.96	RSL6883-***-MPU-RB-Δ	10.46			
		1,100	Roller			High Temp Phenolic (475°)	SSL6883-***-HTPH-RB-Δ	13.34	RSL6883-***-HTPH-RB-Δ	11.84			
		1,100	Precision			Envirothane™ Grey Crowned	SSL6883-***-UGC-PB-Δ	12.51	RSL6883-***-UGC-PB-Δ	11.01			
		1,200	Roller			ALTthane™	SSL6883-***-ALT-RB-Δ	11.64	RSL6883-***-ALT-RB-Δ	10.14			
		1,200	Roller			Lava™ (475°)	SSL6883-***-LV-RB-Δ	11.53	RSL6883-***-LV-RB-Δ	10.03			
		1,200	Precision			PurThane™	SSL6883-***-PTN-PB-Δ	13.46	RSL6883-***-PTN-PB-Δ	11.96			
		1,200	Roller			Envirothane™	SSL6883-***-U-RB-Δ	12.58	RSL6883-***-U-RB-Δ	11.08			
		1,200	Precision			Envirothane™ Grey - PB	SSL6883-***-UG-PB-Δ	12.45	RSL6883-***-UG-PB-Δ	10.95			
		1,200	Roller			Envirothane™ Grey-WOW-RB	SSL6883-***-UGW-RB-Δ	12.58	RSL6883-***-UGW-RB-Δ	11.08			
		1,300	Roller			Lava™-WOW (475°)	SSL6883-***-LVW-RB-Δ	11.94	RSL6883-***-LVW-RB-Δ	10.44			
		1,400	Roller			Phenolic	SSL6883-***-PH-RB-Δ	13.24	RSL6883-***-PH-RB-Δ	11.74			
		1,400	Roller			RollX™	SSL6883-***-RX-RB-Δ	11.48	RSL6883-***-RX-RB-Δ	9.98			
		1,400	Roller			Solid Steel	SSL6883-***-SS-RB-Δ	16.68	RSL6883-***-SS-RB-Δ	15.18			
		1,400	Roller			V Groove	SSL6883-***-VG-RB-Δ	18.64	RSL6883-***-VG-RB-Δ	17.14			
		1,500	Roller			Moldon Alum. Urethane	SSL6883-***-MAU-RB-Δ	12.68	RSL6883-***-MAU-RB-Δ	11.18			
		1,500	Roller			Nyroll™	SSL6883-***-NYNW-RB-Δ	12.09	RSL6883-***-NYNW-RB-Δ	10.59			
		1,500	Roller			RollX™-WOW	SSL6883-***-RXW-RB-Δ	11.89	RSL6883-***-RXW-RB-Δ	10.39			
		1,500	Roller			Moldon Urethane	SSL6883-***-UR-RB-Δ	15.84	RSL6883-***-UR-RB-Δ	14.34			
		1,500	Roller			Moldon Urethane Crown	SSL6883-***-URC-RB-Δ	15.40	RSL6883-***-URC-RB-Δ	13.90			

* Caster weight and OH based on Plate
* See stem options for overall height (OH) differences

STEMS

STANDARD THREADED LENGTH: 4"
STANDARD ROUND LENGTH: 4"

CUSTOM DIAMETERS: any
STANDARD LENGTHS: any





THREADED STEMS +/-0.00" (0mm) To Std OH

***	DIAMETER	LENGTH	TYPE
1/2-13X4H0	1/2"	4"	NC
5/8-11X4	5/8"	4"	NC
3/4-10X4	3/4"	4"	NC
7/8-9X4	7/8"	4"	NC
1-8X4	1"	4"	NC

ROUND STEMS +/-0.00" (0mm) To Std OH

***	DIAMETER	LENGTH	TYPE
500 X 4	1/2"	4"	Plain
625 X 4	5/8"	4"	Plain
750 X 4	3/4"	4"	Plain
875 X 4	7/8"	4"	Plain
1.000 X 4	1"	4"	Plain
1.375 X 4	1 3/8"	4"	Plain

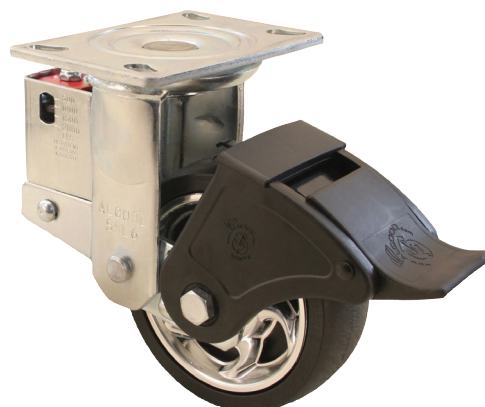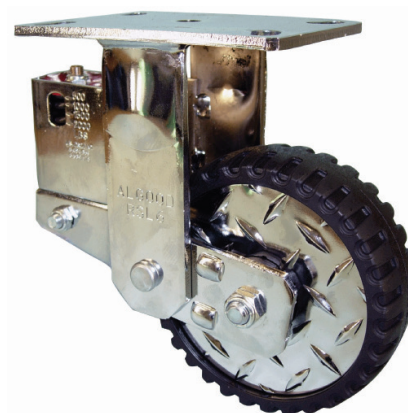




SL7003

SPRING LOADED SERIES

1,000 LBS

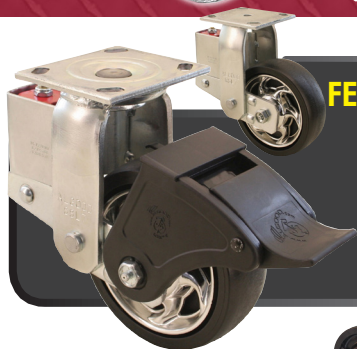

FEATURES

KINGPIN: 5/8" diameter nut and bolt coined
RACEWAY: 5/16" diameter upper race; 1/4" diameter lower race; hardened steel load bearings
BUSHING: Roller bearings with drilled hardened steel spanner bushing and plastic side washers

AXLE&NUT: 1/2" zerk axle and lock nut (except with PB)
FINISH: Corrosion resistant bright zinc
LUBRICATION: Grease nipple in lower race
HARDENED: Work hardened double ball race
LEG SPACING: 2 1/2"

EXCELLENT FOR:

- Mobile motion picture staging
- In-plant trailer parts
- Trash containers
- Tool carts
- Amusement parks
- Asphalt paving machinery
- Aircraft ground support equipment
- Material handling equipment



WHEEL

CASTER

PART NUMBER


OPTIONS:

- iLKW** Wheel Only iLock (for 6" only)
UWB Universal Wheel Brake
1PSL 1 Position Swivel Lock
2PSL 2 Position Swivel Lock
3PSL 3 Position Swivel Lock
4PSL 4 Position Swivel Lock without wings (welded)
BB Ball Bearing
BR Bronze Bearing
DB Delrin Bearing
NB Nylon Roller Bearing
PB Precision Ball Bearing
RBC Caged Roller Bearing
C Raceway Seal
OH Special Overall Height
SSW Steel Side Washer
SWH Heat-treated Side Washer
TG Thread Guards
Z Zerk in Wheel

Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel	Caster Weight (lbs)	Rigid	Caster Weight (lbs)
5"	2"	350	Ball	4 13/16"	8"	Alum. Rubber Grey	SSL7063-***-5ARG-BB-Δ	9.43	RSL7063-***-5ARG-BB-Δ	8.58
		425	Roller			ProTech™ Crown	SSL7063-***-5PRO-RB-Δ	8.46	RSL7063-***-5PRO-RB-Δ	7.61
		450	Roller			Moldon Rubber	SSL7063-***-5MR-RB-Δ	10.14	RSL7063-***-5MR-RB-Δ	9.29
		500	Roller			Moldon Alum. Rubber	SSL7063-***-5MAR-RB-Δ	8.92	RSL7063-***-5MAR-RB-Δ	8.07
		650	Roller			Polyolefin	SSL7063-***-5POX-RB-Δ	7.97	RSL7063-***-5POX-RB-Δ	7.12
		750	Roller			High Temp Phenolic (475°)	SSL7063-***-5HTPH-RB-Δ	9.02	RSL7063-***-5HTPH-RB-Δ	8.17
		800	Roller			Lava™ (475°)	SSL7063-***-5LV-RB-Δ	8.32	RSL7063-***-5LV-RB-Δ	7.47
		900	Roller			Moldon Poly. Urethane	SSL7063-***-5MPU-RB-Δ	8.70	RSL7063-***-5MAU-RB-Δ	7.85
		950	Roller			AlThane™	SSL7063-***-5ALT-RB-Δ	8.32	RSL7063-***-5ALT-RB-Δ	7.47
		1,000	Roller			Ductile Iron Crowned	SSL7063-***-5DIC-RB-Δ	11.54	RSL7063-***-5DIC-RB-Δ	10.69
		1,000	Roller			Lava™-WOW (475°)	SSL7063-***-5LVW-RB-Δ	8.63	RSL7063-***-5LVW-RB-Δ	7.78
		1,000	Roller			Moldon Alum. Urethane	SSL7063-***-5MAU-RB-Δ	8.82	RSL7063-***-5MAU-RB-Δ	7.97
		1,000	Roller			Nyroll™	SSL7063-***-5NYNW-RB-Δ	8.56	RSL7063-***-5NYNW-RB-Δ	7.71
		1,000	Roller			Phenolic	SSL7063-***-5PH-RB-Δ	8.92	RSL7063-***-5PH-RB-Δ	8.07
		1,000	Precision			Purthane™	SSL7063-***-5PTN-PB-Δ	9.34	RSL7063-***-5PTN-PB-Δ	8.49
		1,000	Roller			RollX™	SSL7063-***-5RX-RB-Δ	8.26	RSL7063-***-5RX-RB-Δ	7.41
		1,000	Roller			RollX™-WOW	SSL7063-***-5RXW-RB-Δ	8.58	RSL7063-***-5RXW-RB-Δ	7.73
		1,000	Roller			Solid Steel	SSL7063-***-5SS-RB-Δ	10.96	RSL7063-***-5SS-RB-Δ	10.11
		1,000	Roller			Envirothane™	SSL7063-***-5U-RB-Δ	8.72	RSL7063-***-5U-RB-Δ	7.87
		1,000	Roller			Envirothane™ Grey-WOW-RB	SSL7063-***-5UGW-RB-Δ	8.72	RSL7063-***-5UGW-RB-Δ	7.87
		1,000	Precision			Envirothane™ Grey - PB	SSL7063-***-5UG-PB-Δ	8.78	RSL7063-***-5UG-PB-Δ	7.93
		1,000	Roller			Moldon Urethane	SSL7063-***-5UR-RB-Δ	10.76	RSL7063-***-5UR-RB-Δ	9.91
		1,000	Roller			V Groove	SSL7063-***-5VG-RB-Δ	11.98	RSL7063-***-5VG-RB-Δ	11.13

FINISHES:

- SL70?2 Chrome
 SL70?41 Black Ionic
 Inquiries on other finishes welcome

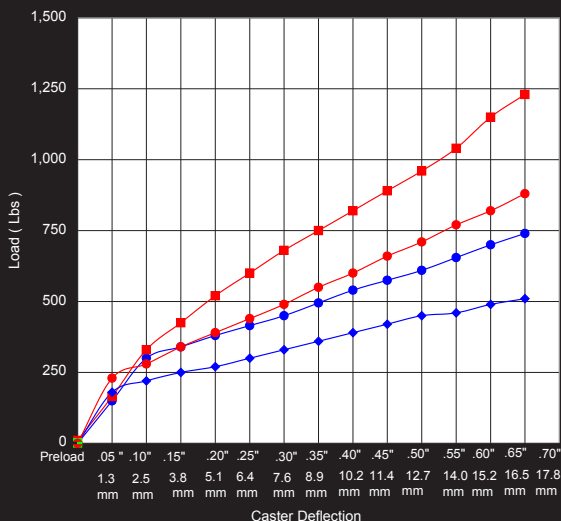


STANDARD PLATE:

A38H

H - Plate Thickness: 1/4"

PLATE DIAGRAMS

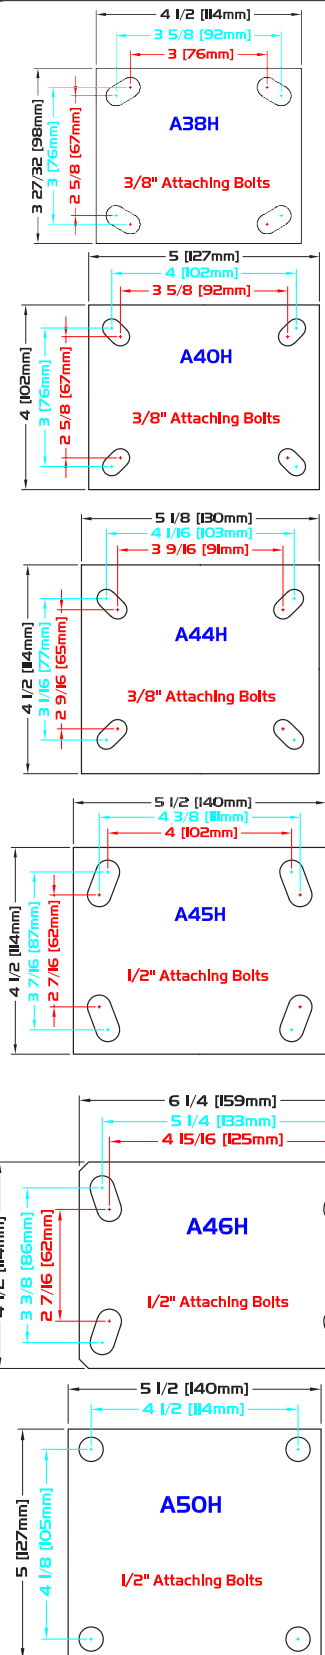

WHEEL		CASTER		PART NUMBER						
Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel	Caster Weight (lbs)	Rigid	Caster Weight (lbs)
6"	2"	275	Precision	5 5/16"	8 1/2"	Flat Free	SSL7063-***-FFC-PBB-Δ	8.89	RSL7063-***-FFC-PBB-Δ	8.04
		450	Ball			Balloon Cushion Rubber Grey	SSL7063-***-BARG-BB-Δ	9.77	RSL7063-***-BARG-BB-Δ	8.92
		450	Roller			ProTech™ Crown	SSL7063-***-PRO-RB-Δ	8.76	RSL7063-***-PRO-RB-Δ	7.91
		500	Roller			Moldon Alum. Rubber	SSL7063-***-MAR-RB-Δ	9.44	RSL7063-***-MAR-RB-Δ	8.59
		550	Roller			Moldon Rubber	SSL7063-***-MR-RB-Δ	11.12	RSL7063-***-MR-RB-Δ	10.27
		600	Roller			ProTech™ Flat	SSL7063-***-PROF-RB-Δ	8.76	RSL7063-***-PROF-RB-Δ	7.91
		800	Roller			Polyolefin	SSL7063-***-POX-RB-Δ	8.13	RSL7063-***-POX-RB-Δ	7.28
		900	Roller			High Temp Phenolic (475°)	SSL7063-***-HTPH-RB-Δ	9.82	RSL7063-***-HTPH-RB-Δ	8.97
		900	Roller			Moldon Poly. Urethane	SSL7063-***-MPU-RB-Δ	9.22	RSL7063-***-MPU-RB-Δ	8.37
		1,000	Roller			ALThane™	SSL7063-***-ALT-RB-Δ	8.87	RSL7063-***-ALT-RB-Δ	8.02
		1,000	Roller			ALThane™-WOW	SSL7063-***-ALTWOW-RB-Δ	8.87	RSL7063-***-ALTWOW-RB-Δ	8.02
		1,000	Roller			Ductile Iron Crowned	SSL7063-***-DIC-RB-Δ	12.56	RSL7063-***-DIC-RB-Δ	11.71
		1,000	Roller			Lava™ (475°)	SSL7063-***-LV-RB-Δ	8.53	RSL7063-***-LV-RB-Δ	7.68
		1,000	Roller			Lava™-WOW (475°)	SSL7063-***-LVW-RB-Δ	9.04	RSL7063-***-LVW-RB-Δ	8.19
		1,000	Roller			Moldon Alum. Urethane	SSL7063-***-MAU-RB-Δ	9.40	RSL7063-***-MAU-RB-Δ	8.55
		1,000	Roller			Nyrol™	SSL7063-***-NYNW-RB-Δ	9.03	RSL7063-***-NYNW-RB-Δ	8.18
		1,000	Roller			Phenolic	SSL7063-***-PH-RB-Δ	9.72	RSL7063-***-PH-RB-Δ	8.87
		1,000	Precision			PurThane™	SSL7063-***-PTN-PB-Δ	9.95	RSL7063-***-PTN-PB-Δ	9.10
		1,000	Roller			RollX™	SSL7063-***-RX-RB-Δ	8.48	RSL7063-***-RX-RB-Δ	7.63
		1,000	Precision			RollX™-WOW-PB	SSL7063-***-RXW-PB-Δ	9.35	RSL7063-***-RXW-PB-Δ	7.23
		1,000	Roller			RollX™-WOW	SSL7063-***-RXW-RB-Δ	9.06	RSL7063-***-RXW-RB-Δ	6.94
		1,000	Roller			Solid Steel	SSL7063-***-SS-RB-Δ	12.10	RSL7063-***-SS-RB-Δ	11.25
		1,000	Roller			Envirothane™	SSL7063-***-U-RB-Δ	9.40	RSL7063-***-U-RB-Δ	8.55
		1,000	Roller			Envirothane™ Grey-WOW-RB	SSL7063-***-UGW-RB-Δ	9.40	RSL7063-***-UGW-RB-Δ	8.55
		1,000	Precision			Envirothane™ Grey - PB	SSL7063-***-UG-PB-Δ	9.17	RSL7063-***-UG-PB-Δ	8.32
		1,000	Precision			Envirothane™ Grey Crowned	SSL7063-***-UGC-PB-Δ	9.12	RSL7063-***-UGC-PB-Δ	8.27
		1,000	Roller			Moldon Urethane	SSL7063-***-UR-RB-Δ	11.58	RSL7063-***-UR-RB-Δ	10.73
		1,000	Roller			V Groove	SSL7063-***-VG-RB-Δ	13.22	RSL7063-***-VG-RB-Δ	12.37
8"	2"	280	Precision	6 7/8"	10 1/2"	Flat Free	SSL7083-***-FFC-PBB-Δ	9.47	RSL7083-***-FFC-PBB-Δ	8.62
		550	Ball			Balloon Cushion Rubber Grey	SSL7083-***-BARG-BB-Δ	11.89	RSL7083-***-BARG-BB-Δ	11.04
		600	Roller			Moldon Alum. Rubber	SSL7083-***-MAR-RB-Δ	10.88	RSL7083-***-MAR-RB-Δ	10.03
		600	Roller			Moldon Rubber	SSL7083-***-MR-RB-Δ	13.50	RSL7083-***-MR-RB-Δ	12.65
		600	Roller			ProTech™ Crown	SSL7083-***-PRO-RB-Δ	10.19	RSL7083-***-PRO-RB-Δ	9.34
		675	Roller			ProTech™ Flat	SSL7083-***-PROF-RB-Δ	10.15	RSL7083-***-PROF-RB-Δ	9.30
		850	Roller			ALThane™	SSL7083-***-ALT-RB-Δ	10.02	RSL7083-***-ALT-RB-Δ	9.17
		850	Roller			High Temp Phenolic (475°)	SSL7083-***-HTPH-RB-Δ	11.72	RSL7083-***-HTPH-RB-Δ	10.87
		850	Roller			Lava™ (475°)	SSL7083-***-LV-RB-Δ	9.91	RSL7083-***-LV-RB-Δ	9.06
		850	Roller			Lava™-WOW (475°)	SSL7083-***-LVW-RB-Δ	10.27	RSL7083-***-LVW-RB-Δ	9.42
		850	Roller			Moldon Alum. Urethane	SSL7083-***-MAU-RB-Δ	11.06	RSL7083-***-MAU-RB-Δ	10.21
		850	Roller			Moldon Poly. Urethane	SSL7083-***-MPU-RB-Δ	10.34	RSL7083-***-MPU-RB-Δ	9.49
		850	Roller			Nyrol™	SSL7083-***-NYNW-RB-Δ	10.47	RSL7083-***-NYNW-RB-Δ	9.62
		850	Roller			Phenolic	SSL7083-***-PH-RB-Δ	11.62	RSL7083-***-PH-RB-Δ	10.77
		850	Roller			Polyolefin	SSL7083-***-POX-RB-Δ	9.17	RSL7083-***-POX-RB-Δ	8.32
		850	Precision			PurThane™	SSL7083-***-PTN-PB-Δ	12.03	RSL7083-***-PTN-PB-Δ	11.18
		850	Roller			RollX™	SSL7083-***-RX-RB-Δ	9.86	RSL7083-***-RX-RB-Δ	9.01
		850	Roller			RollX™-WOW	SSL7083-***-RXW-RB-Δ	10.45	RSL7083-***-RXW-RB-Δ	9.60
		850	Roller			Solid Steel	SSL7083-***-SS-RB-Δ	15.06	RSL7083-***-SS-RB-Δ	14.21
		850	Roller			Envirothane™	SSL7083-***-U-RB-Δ	10.96	RSL7083-***-U-RB-Δ	10.11
		850	Roller			Envirothane™ Grey-WOW-RB	SSL7083-***-UGW-RB-Δ	10.96	RSL7083-***-UGW-RB-Δ	10.11
		850	Precision			Envirothane™ Grey - PB	SSL7083-***-UG-PB-Δ	10.84	RSL7083-***-UG-PB-Δ	9.99
		850	Precision			Envirothane™ Grey Crowned	SSL7083-***-UGC-PB-Δ	10.90	RSL7083-***-UGC-PB-Δ	10.05
		850	Roller			Moldon Urethane	SSL7083-***-UR-RB-Δ	14.22	RSL7083-***-UR-RB-Δ	13.37
		850	Roller			V Groove	SSL7083-***-VG-RB-Δ	17.02	RSL7083-***-VG-RB-Δ	16.17


* Caster weight and OH based on Plate

* See stem options for overall height (OH) differences

STEMS

STANDARD THREADED LENGTH: 4"
STANDARD ROUND LENGTH: 4"

CUSTOM DIAMETERS: any
STANDARD LENGTHS: any



THREADED STEMS +/-0.00" [0mm] To Std OH

***	DIAMETER	LENGTH	TYPE
1/2-13X4	1/2"	4"	NC
5/8-11X4	5/8"	4"	NC
3/4-10X4	3/4"	4"	NC
7/8-9X4	7/8"	4"	NC
1-8X4	1"	4"	NC

ROUND STEMS +/-0.00" [0mm] To Std OH

***	DIAMETER	LENGTH	TYPE
500 X 4	1/2"	4"	Plain
625 X 4	5/8"	4"	Plain
750 X 4	3/4"	4"	Plain
875 X 4	7/8"	4"	Plain
1.000 X 4	1"	4"	Plain
1.375 X 4	1 3/8"	4"	Plain

